

Q7H Series


Constant Current LED Driver

LED恒流驱动器

Features:

- Extra small compact housing
- Driver for built-in use
- Push wire connections
- Suitable for protection class I and II luminaires
- High power factor
- high efficiency
- Protections: opencircuit, shortcircuit, overload, overtemperature
- SELV class II output

- 紧凑塑壳设计
- 内置式驱动
- 按压式接线端子
- 适用I类和II类灯具
- 高功率因数设计
- 高效率, 温升低
- 输出开路, 短路, 过载和超温保护
- SELV和II类等级

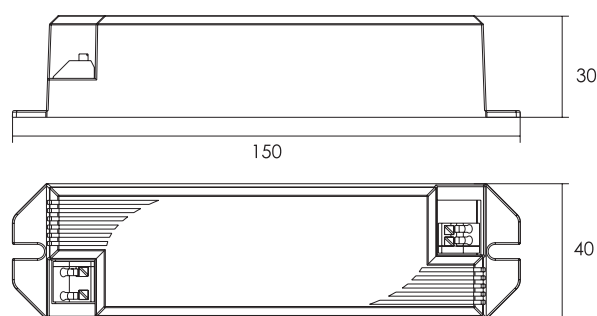

Parameters:

Model No.	Input voltage	Max. output power	Output current	Output voltage	Power factor	THD	Efficiency full load	No-load power	Ambient temperature	Max. casing temperature	Isolation	Dimensions LxWxH	Weight
型号	额定电压 (V)	功率 (W)	输出电流 (mA)	输出电压 (V)	功率因数 (λ)	总谐波 (%)	效率 (%)	空载功率 (W)	环境温度 ta (°C)	最大外壳温度 tc (°C)	隔离	尺寸 (mm)	重量 (g)
Q7H-500mA-30W	220-240	30	500	20-60	0.95	<15	87	<0.5	-20...+50	80	SELV	150x40x30	140
Q7H-700mA-30W	220-240	30	700	13-43	0.95	<15	87	<0.5	-20...+50	80	SELV	150x40x30	140
Q7H-1050mA-30W	220-240	30	1050	10-29	0.95	<15	86	<0.5	-20...+50	85	SELV	150x40x30	140
Q7H-500mA-40W	220-240	40	500	27-80	0.95	<15	89	<0.5	-20...+50	85	SELV	150x40x30	140
Q7H-700mA-40W	220-240	40	700	20-57	0.95	<15	91	<0.5	-20...+50	85	SELV	150x40x30	140
Q7H-900mA-40W	220-240	40	900	15-45	0.95	<15	89	<0.5	-20...+50	85	SELV	150x40x30	140
Q7H-1050mA-40W	220-240	40	1050	12-38	0.95	<15	90	<0.5	-20...+50	85	SELV	150x40x30	140
Q7H-1400mA-40W	220-240	40	1400	10-29	0.95	<15	89	<0.5	-20...+50	85	SELV	150x40x30	140
Q7H-850mA-45W	220-240	45	850	17-53	0.95	<15	90	<0.5	-20...+50	85	SELV	150x40x30	140
Q7H-1050mA-45W	220-240	45	1050	15-43	0.95	<15	90	<0.5	-20...+50	85	SELV	150x40x30	140